

Vehicle Applications

CHRYSLER

2015 300* (see note below)

DODGE

2014-2015 Durango

JEEP

2014-2016 Grand Cherokee

*NOTE :

2015 Chrysler 300 must NOT have a separate CD slot. If a separate CD slot is present (2-Piece radio), use Part#RVCCH-75K.

Features

- Plug and Play Connections for ease of use.

Radio Compatibility

- U-Connect 8.4" Screen
- U-Connect 5" 6-Button / 2 Knob Radio

Parts Included



CH-75C MODULE




CH-75C HARNESS (2620)



CH-75C CAMERA (CCH-01G)



Wiring Diagram

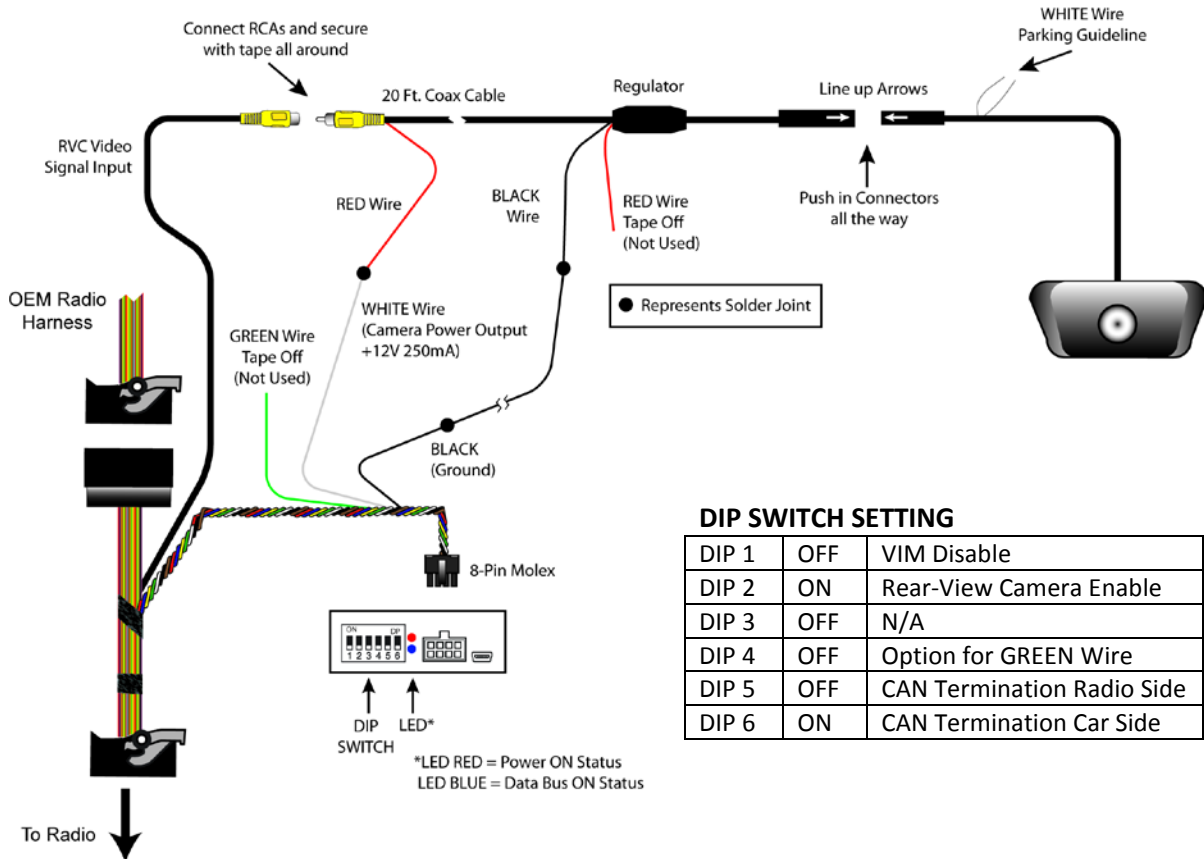

DIP SWITCH SETTING

DIP 1	OFF	VIM Disable
DIP 2	ON	Rear-View Camera Enable
DIP 3	OFF	N/A
DIP 4	OFF	Option for GREEN Wire
DIP 5	OFF	CAN Termination Radio Side
DIP 6	ON	CAN Termination Car Side

Installation Instructions

INSTALLING THE CAMERA AND CABLE

1. Remove the rear lip panel.
2. Drill a 5/8 inch size hole in the available location
3. Fish the wires thought the drilled hole and through the pass through into the trunk/cargo area.
Make the video and power connection.
4. Remove the factory radio to gain access to the factory connectors.
5. Route the wires towards the radio and make the power and video connections. For powering up the camera, use the 12V OUTPUT (**White Wire**). (See Wiring Diagram above)
6. Test the camera before re-installing the radio.

Note: The camera is defaulted to power down after 10 seconds.



PARKING LINE


The parking lines are there to assist you while reversing. To activate the parking lines simply connect the WHITE loop wire located near the 4 pin camera connector.

What the Lines mean:

Green Line: CLEAR

Yellow Line: GETTING CLOSE

Red Line: WARNING - VERY CLOSE

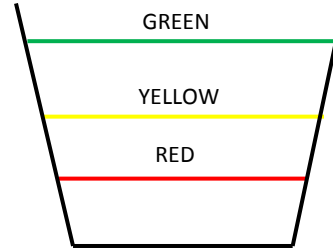

COMPATIBLE RADIOS



8.4" Screen with Separate Knobs



5" Screen with 6 Buttons & Separate Knobs

NOT COMPATIBLE RADIO



4.3" Screen with 4 Buttons & 2 Knobs

