

**PRODUCT FEATURES:**

- Replaces the factory third brake light to maintains the OEM look.
- LED brake light included.
- 6 Infra Red LEDs for night time use.
- With built-in microphone.
- Uses 4-pin aviation type water resistant connectors.


**PARTS INCLUDED:**

1. Third Brake Light camera
2. 33' extension cable
3. Power connection cable X2
4. 4-pin aviation connector to RCA adapter
5. Male to Male RCA adapter



**INSTALLATION INSTRUCTIONS:**

1. Remove the factory third brake light.
2. Run the extension cable provided towards the radio.
3. Plug the 4-pin aviation connector of the extension cable to the camera cable.
4. Make the power and video connections at the radio or at the brake light.
5. Test the camera prior to reinstalling in the third brake light location.

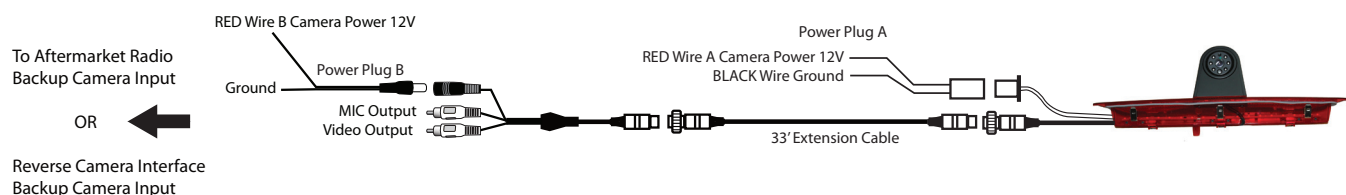

**\*NOTE:** To power the camera, use RED Wire A or B. If tapping power from the radio or RVC Interface, Power Plug A will not longer be used. If you will be tapping power from the reverse light +12V, power plug B will no longer be used. With either connection the Black GROUND wire needs to be connected to a solid chassis ground. For vehicles with manual transmission, we recommend tapping +12V power from the reverse light.

**VEHICLE APPLICATIONS:**

**FORD**

2014 - 2015 Transit Van

