



**RVCMZ-72**



**MAZDA**  
For 2013 - UP Vehicles  
with Touchscreen Monitors

**Important:** This interface does not require the installer to tap for REVERSE signal. The switching will occur automatically.

**REAR-VIEW INTEGRATION w/ CAMERA FOR MAZDA VEHICLES (w/FACTORY MONITOR) 2013-UP**

We recommend reading this installation guide first before starting any work. Following these instructions from "Start" to "Finish" will ensure a smooth and hassle free installation. We offer telephone support M-F 9:00 AM - 5:00PM PDT at 1 (855) 822-1348. We are here to help.

**PARTS INCLUDED:**

- (1) Rear Camera (MZ-72)
- (1) 15 ft. Extension
- (1) MZ-72 Harness
- (1) Instruction

**Camera Specifications:**

- Lens Angle 170 Degrees
- Resolution 420
- NTSC/ PAL
- Reference Lines
- Waterproof
- Pixels 656 x 492

**PRECAUTIONS:**

- Remove the negative side of the battery to avoid any short circuits during the installation.
- Do not install the interface near any major components or near the HVAC system. This may cause damage or overheating to the vehicle.
- **Do not disconnect the airbag connection behind the radio panel.**

**PRELIMINARY:**

Please read the entire manual before installing this interface.

**TOOLS NEEDED:**



- Hex Screw Set
- Drill Gun
- Panel Remover

**INSTALLING THE CAMERA AND CABLE**

1. Remove the rear panel between the Mazda logo and license plate using a panel removal tool.
2. Drill a 5/8 size hole in the location
3. Fish the wires through the drilled hole and through the pass through into the trunk/cargo area.
4. Remove the factory radio to gain access to the factory connectors.
5. Route the wires towards the radio and make the power and video connections. Tap power and ground at the cigarette lighter.


**NOTE:** DO NOT CONNECT A REVERSE TRIGGER WIRE TO THE MZ-72 HARNESS, THE RADIO DISPLAY WILL SWITCH AUTOMATICALLY WHEN THE REVERSE GEAR IS ENGAGED.

**CAMERA CONNECTIONS**

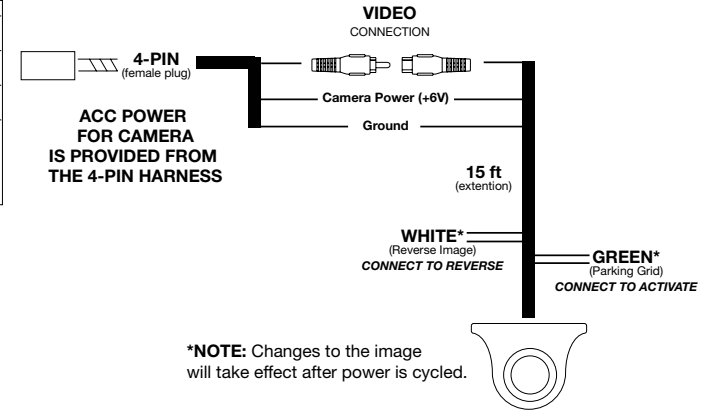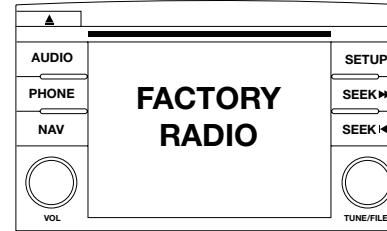

**REVERSE IMAGE**


If the camera angle is inverted (upside down), please cut the WHITE wire located near the 4 pin tail connector in the trunk.



**PARKING LINE**

The parking lines are there to assist you while reversing. What the lines mean:  
 Yellow Line: CLEAR  
 Purple Line: GETTING CLOSE  
 Red Line: WARNING - VERY CLOSE

To remove the parking lines simply cut the GREEN wire located near the 4 pin tail connector in the truck.

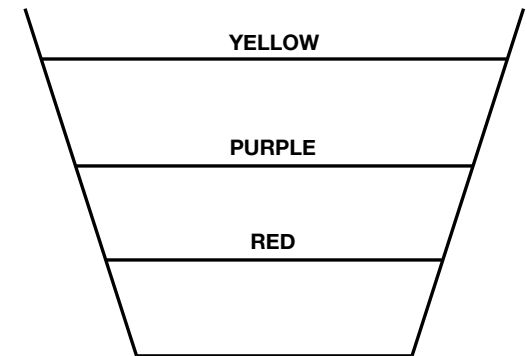

**TROUBLE SHOOTING**

1. No video display while in reverse.
  - Make sure the trunk is closed, as this will dis-engage the camera while in reverse.



# REAR-VIEW INTEGRATION w/ CAMERA FOR MAZDA VEHICLES (w/FACTORY MONITOR) 2013-UP

RVCMZ-72



COMPATIBLE RADIO:

**MAZDA**  
For 2013 - UP Vehicles  
with Touchscreen Monitors

**Important:** This interface does not require the installer to tap for REVERSE signal. The switching will occur automatically.

