

PRODUCT FEATURES:

- Replaces factory trunk handle assembly.
- Retains push button trunk release switch function.
- Selectable Parking Guide Line ON or OFF.
- Maintains the OEM look.


PARTS INCLUDED:

1. Trunk handle camera
2. 20" extension cable



INSTALLATION INSTRUCTIONS:

1. Carefully remove the factory trunk handle. It is held in place by 2 screws behind the handle.
2. Unplug the trunk release switch connector.
3. Run the CAD-05T camera cable to the inside of the cabin towards the radio.
4. Make the power and video connections to the RVC interface or the aftermarket radio.
5. Test the camera for functionality
6. Plug the factory trunk release connector to the CAD-05T.
7. Install the new trunk handle camera.

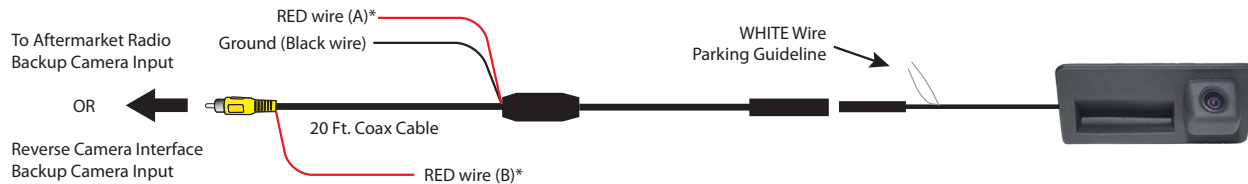

***NOTE:** To power the camera, use RED Wire A or B. If tapping power from the radio or RVC Interface, make sure to insulate RED Wire A to avoid it from shorting. If you will be tapping power from the reverse light +12V, insulate RED Wire B to avoid it from shorting. With either connection the Black GROUND wire needs to be connected to a solid chassis ground. For vehicles with manual transmission, we recommend tapping +12V power from the reverse light.

WHITE Wire: Connect to show parking guide line. Disconnect to remove. Insulate with tape to avoid from shorting.

Note: Cycle the camera power after connecting or disconnecting the control wire.

VEHICLE APPLICATIONS:

AUDI

2015-2018	A3	2009-2017	Q3
2009-2016	A4	2009-2017	Q5
2009-2016	A5	2009-2017	S4
2012-2016	A6	2009-2017	S5
2009-2014	A8	2009-2014	S8

VOLKSWAGEN

2010-2016	Golf SEL
2011-2016	Jetta
2011-2016	Passat

Convertibles may need Crux part# CAD-05R

